


### G型挡圈（轴用）规格表

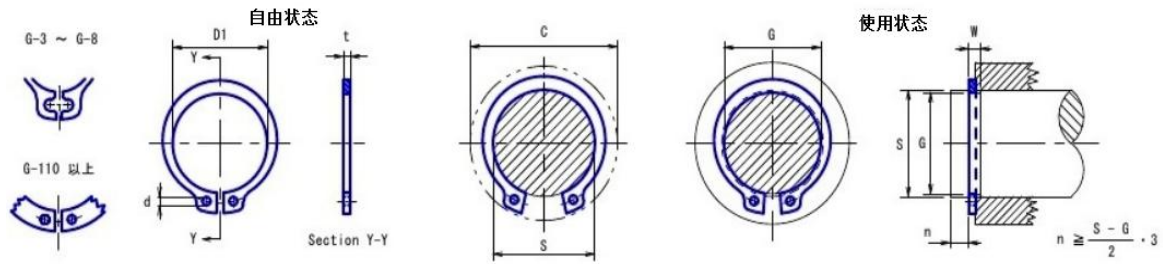

产品的称呼 如 轴承用G型挡圈

名称	轴径 S	挡圈尺寸					沟槽尺寸				安装 直径 C	轴向 许用 负荷		
		内径		板厚		小孔径	槽径		槽宽					
		D1	公差	t	公差	d	G	公差	W	公差				
G-3	3	2.6	+0.05 -0.10	0.25	±0.02	0.8	2.7	±0.03	0.30	+0.05 -0.00	6.3	481		
G-4	4	3.6		0.25		0.8	3.7		0.30					
G-5	5	4.6		0.40		0.8	4.7		0.45					
G-6	6	5.5		0.40		0.8	5.7		0.45					
G-7	7	6.4	+0.05 -0.12	0.65	±0.03	1.0	6.7	±0.05	0.73		13.0	2942		
G-8	8	7.4		0.65		1.0	7.7		0.73					
G-9	9	8.2		0.65		1.0	8.4		0.73					
G-10	10	9.0		0.65		1.0	9.4		0.73					
G-11	11	10.0		0.65		1.0	10.3		0.73					
G-12	12	11.0		0.65		1.2	11.3		0.73					
G-13	13	12.0		0.90		1.2	12.3		1.00					
G-14	14	13.0		0.90		1.2	13.3		1.00					
G-15	15	13.9	+0.10 -0.25	0.90	±0.05	1.2	14.3	±0.07	1.00	19.3	7551			
G-16	16	14.8		0.90		1.2	15.3		1.00					
G-17	17	15.7		0.90		1.6	16.2		1.00					
G-18	18	16.7		1.00		1.6	17.2		1.10					
G-19	19	17.6		1.00		1.6	18.2		1.10					
G-20	20	18.5		1.00		1.6	19.1		1.10					
G-22	22	20.4		1.00		1.6	21.0		1.10					
G-25	25	23.1		1.00		1.6	23.9		1.10					
G-28	28	25.9		1.40		2.6	26.8		1.55					
G-30	30	27.8		1.40		2.6	28.6		1.55					
G-32	32	29.6	+0.25 -0.35	1.40	±0.07	2.6	30.6	±0.10	1.55	43.8	35304			
G-35	35	32.4		1.40		2.6	33.4		1.55					
G-38	38	35.2		1.40		3.2	36.3		1.55					
G-40	40	37.0		1.60		3.2	38.2		1.75					
G-45	45	41.7		1.60		3.2	43.0		1.75					
G-50	50	46.2		1.60		3.2	47.8		1.75					
G-55	55	50.9		+0.50 -0.60		2.00	±0.25		3.2	52.5	±0.25	2.20	47.0	39227
G-60	60	55.6				2.00			3.2	57.3		2.20		
G-65	65	60.2	2.00		3.2	62.1		2.20						
G-70	70	64.8	2.30		3.2	66.8		2.55						
G-75	75	69.4	2.30		3.2	71.6		2.55						
G-80	80	74.1	2.30		3.2	76.4		2.55						
G-85	85	78.7	+0.50 -0.70	2.30	±0.07	3.2	81.2	±0.35	2.55	26.1	13729			
G-90	90	83.3		2.90		3.2	86.0		3.18					
G-95	95	87.9		2.90		3.2	90.7		3.18					
G-100	100	92.6		2.90		3.2	95.6		3.18					
G-105	105	97.2		+0.50 -0.80		2.90	±0.40		3.2	100.0	±0.40	3.18	27.2	14710
G-110	110	101.7				2.90			3.2	105.0		3.18		
G-120	120	111.6	2.90		3.2	114.5		3.18						
G-130	130	122.2	2.90		4.0	125.0		3.18						
G-140	140	131.1	3.20		4.0	133.7		3.50						
G-150	150	142.0	3.20		4.0	146.0		3.50						